


# FK99系列

## FK9926机柜风扇及过滤器

过滤器材料 ABS

阻燃等级 UL94-V2

IP等级 IP54



专利号: ZL 2013 3 0051068.9  
RAL7035

风扇及过滤器  
FK 9926....






风扇及过滤器  
FK 9926.230

出口过滤器  
FK 9926.300

风扇及过滤器  
FK9926.230-260.NO  
(常开)

安装剖面  
FK 9926....

功率特性曲线  
FK 9926....

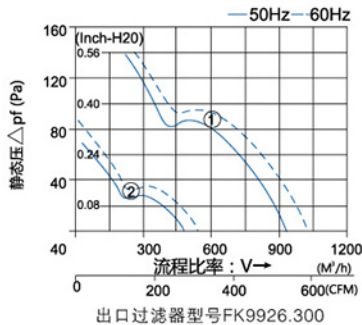

### 技术数据

|               | 型号                                                                                      | 订货号      | 型号                | 订货号      |
|---------------|-----------------------------------------------------------------------------------------|----------|-------------------|----------|
|               | FK9926.230                                                                              | 2023.031 | FK9926.115        | 2023.032 |
| 常开 (绿灯亮)      | FK9926.230-260.NO                                                                       | 2023.034 | FK9926.115-260.NO | 2023.035 |
|               | FK9926.230-EMC                                                                          | 2023.058 |                   |          |
| 轴流风机          | F2E-260B-230                                                                            |          | F2E-260B-115      |          |
| 额定工作电压 (伏/赫兹) | 230/50/60                                                                               |          | 115/50/60         |          |
| 空气流量, 自由吹风    | 500/560m³/h                                                                             |          |                   |          |
| 轴流风扇          | 电容电动                                                                                    |          |                   |          |
| 额定电流 (安)      | 0.29/0.33                                                                               |          | 0.61/0.63         |          |
| 功率 (瓦)        | 65/77                                                                                   |          | 61/71             |          |
| 噪音水平 (分贝)     | 62/64                                                                                   |          |                   |          |
| 工作温度范围        | -10℃至+55℃                                                                               |          |                   |          |
| 出口过滤器型号       | FK9926.300 / FK9926.300-EMC 2023.040 / 2023.059                                         |          |                   |          |
| 过滤棉型号         | 1米×1.8米×20mm厚 8011.145(IP55)/ 1米×1.8米×12mm厚 8011.146(IP54)/ 1米×1.8米×6mm厚 8011.147(IP54) |          |                   |          |

※ 需要特殊电压或者其他网罩可致电  
询问本公司!