

概述 Overview

我公司多年来采用优质材料和先进的工艺技术专业生产160VA到10KVA之间，JSG系列三相干式变压器，是我公司参照西门子公司同类产品最新研制开发数控系统用变压器，尤其160VA—10KVA之间的三相干式变压器，产品外形的安装尺寸已经标准化，与西门子4AP系列通用，产品符合VDE0550、IEC439、JB5555、GB5226等国际、国家标准。

JSG系列三相干式变压器广泛适用于交流50/60Hz，输入、输出电压不超过1120V的各种三相供电场合。

产品的各种输入，输出电压的高低、联接组别、调节抽头的多少及位置(一般为±5%)、绕组容量的分配、次级单相绕组的配备、整流电路的运用、是否要求带外壳等，均可根据用户的要求进行精心的设计与制造。


Adopting technology of Siemens company, we design and manufacture JSG series three phase transformer with voltage between 160VA and 16KVA. The figure and installation size have been standardized and can be used together with 4AP series of Siemens.

JSG series transformer used for equipment with input and output voltage less than 500V and frequency 50/60Hz.


Product comply with VDE0550, IEC439, JB5555, GB5226 standard.



型号及其含义 Type and meaning

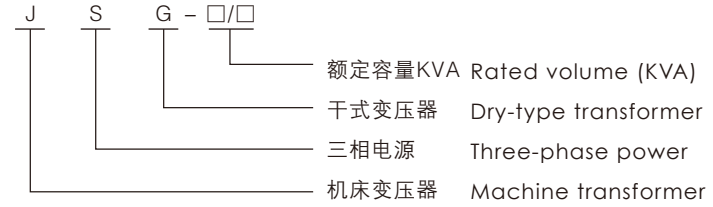

外形及安装尺寸 Appearance and installing size

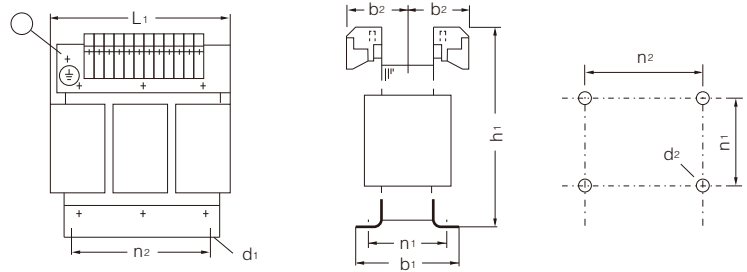

JSG-0.16~JSG-5

技术数据 Technical data

型号 Model	订货号 Order number	容量 Capacity KVA	b1 max	b2 max	d1	d2	h1 max	L1 max	n1	n2
JSG-0.16	4014.001	0.16	64	50	5 × 8	M4	140	122	49	90
JSG-0.25	4014.002	0.25	67	48	6 × 12	M5	162	156	49	113
JSG-0.4	4014.003	0.4	82	56	6 × 12	M5	162	156	64	113
JSG-0.63	4014.004	0.63	76	51	7.4 × 13	M6	187	181	56	136
JSG-1	4014.005	1	97	61	7.4 × 13	M6	187	181	76	136
JSG-1.6	4014.006	1.6	115	98	7.4 × 13	M6	214	229	94	170
JSG-2.5	4014.007	2.5	133	102	10 × 18	M8	241	264	114	200
JSG-4	4014.008	4.0	148	104	10 × 18	M8	250	300	118	224
JSG-6.3	4014.009	6.3	155	129	10 × 18	M8	320	360	127	264
JSG-8	4014.010	8	170	134	12 × 20	M10	380	420	120	315
JSG-10	4014.011	10	170	134	12 × 20	M10	380	420	120	315